


Chaletino

15 mm tongue/groove

Technical information	
Produced according to:	European parquet norm EN 13489 - 2017
Dimension:	15 x 300 x 2750 mm
Toplayer:	about 3.5 mm
Construction:	3-layer construction; Hardwood toplayer, middlelayer and bottomlayer made of spruce Toplayer about 3.5 mm Middlelayer 8.0 mm Bottomlayer 3.5 mm
Boards/ m ² per carton:	2/ 1.65
Cartons/ m ² per pallet:	39/ 64.35
Slotted top layers per carton/ minimum length (mm):	-
Weight per carton/ pallet in kg:	14/ 546
Floor heating systems:	Well suitable
Fire behavior ¹⁾ :	Dfl-s1
Content of formaldehyd ²⁾ :	E1
Content of pentachlorophenol (PCP) ²⁾ :	no performance detected
Density kg/ m ³ ²⁾ :	about 600
Antislip performance:	Live Natural USRV 40 ²⁾
Abrasion resistance:	-
Thermal conductivity ²⁾ :	0.15 W/ (m·K)
Areal thermal resistance ³⁾ :	0.1 m ² · K/ W

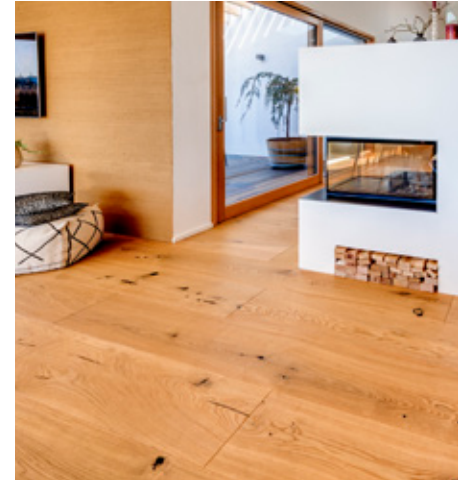

DOP 4658



www.blauer-engel.de/uz176

CE
BOEN AS
 EN 14342



¹⁾ according to DIN EN 13501-1, ²⁾ according to DIN 14342, ³⁾ according to ENV 13696,

⁴⁾ according to DIN 68861, ⁵⁾ according to EN 12524